



5000W



SGDXS-330A40A

一般

SGMXG-55AUA8S


煞車

SGMXG-55AUA8E



驅動器尺寸

SGDXS-330A

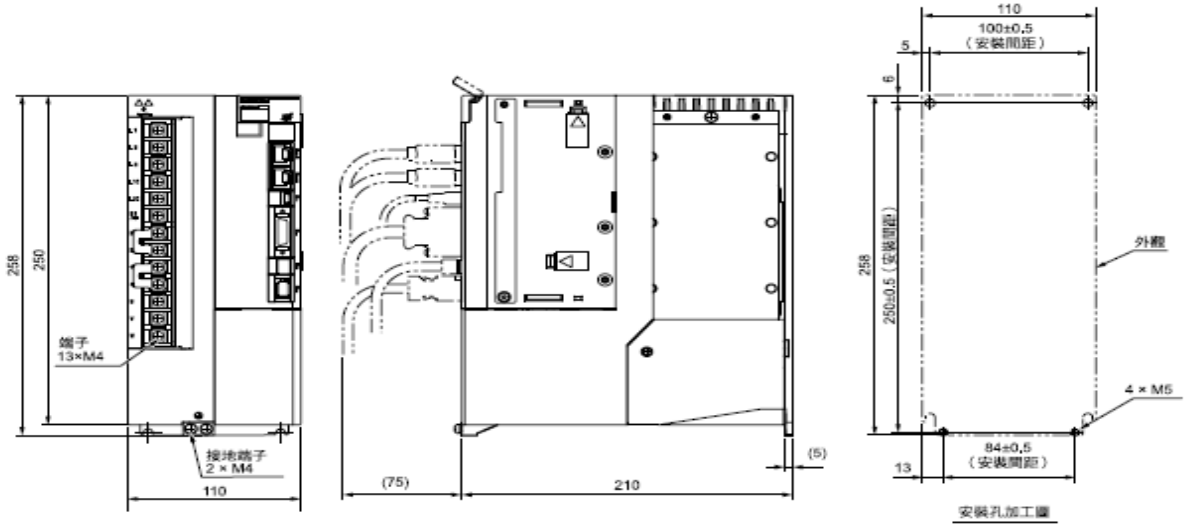


概略重量：4.4 kg
單位：mm

| 型號 SGDXS- | | R70A | R90A | 1R6A | 2R8A | 3R8A | 5R5A | 7R6A | 120A | 180A | 200A | 330A | |
|----------------|---------------|------------------------------------|------|------|------|------|------|------|------|-------|-------|-------|-----|
| 最大適用馬達容量[kW] | | 0.05 | 0.1 | 0.2 | 0.4 | 0.5 | 0.75 | 1.0 | 1.5 | 2.0 | 3.0 | 5.0 | |
| 連續輸出電流[Arms] | | 0.66 | 0.91 | 1.6 | 2.8 | 3.8 | 5.5 | 7.6 | 11.6 | 18.5 | 19.6 | 32.9 | |
| 瞬時最大輸出電流[Arms] | | 2.1 | 3.2 | 5.9 | 9.3 | 11 | 16.9 | 17 | 28 | 42 | 56 | 84 | |
| 主迴路 | 電源 | AC200 V~240 V, -15%~+10%, 50/60 Hz | | | | | | | | | | | |
| | 輸入電流[Arms] *1 | 0.4 | 0.8 | 1.3 | 2.5 | 3.0 | 4.1 | 5.7 | 7.3 | 10 | 15 | 25 | |
| 控制 | 電源 | AC200 V~240 V, -15%~+10%, 50/60 Hz | | | | | | | | | | | |
| | 輸入電流[Arms] *1 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.25 | 0.25 | 0.3 | |
| 電源容量[kVA] *1 | | 0.2 | 0.3 | 0.5 | 1.0 | 1.3 | 1.6 | 2.3 | 3.2 | 4.0 | 5.9 | 7.5 | |
| 電能損耗 *1 | 主迴路電能損耗 [W] | 5.0 | 7.0 | 11.9 | 22.5 | 28.5 | 38.9 | 49.2 | 72.6 | 104.2 | 114.2 | 226.6 | |
| | 控制迴路電能損耗 [W] | 12 | 12 | 12 | 12 | 14 | 14 | 14 | 15 | 16 | 16 | 19 | |
| | 合計電能損耗[W] | 17.0 | 19.0 | 23.9 | 34.5 | 42.5 | 52.9 | 63.2 | 87.6 | 120.2 | 130.2 | 245.6 | |
| 回生電阻 | 內建回生電阻 | 電阻值 [Ω] | - | - | - | - | 35 | 35 | 35 | 20 | 12 | 10 | 6 |
| | | 容量[W] | - | - | - | - | 60 | 60 | 60 | 60 | 60 | 60 | 180 |
| | | 容許消耗電力 [W] | - | - | - | - | 15 | 15 | 15 | 30 | 30 | 30 | 36 |
| | 外置最小容許電阻值[Ω] | 40 | 40 | 40 | 40 | 35 | 35 | 35 | 20 | 12 | 10 | 6 | |
| 過電壓類別 | | III | | | | | | | | | | | |

*1 額定負載時的淨值。

> T-N 曲線

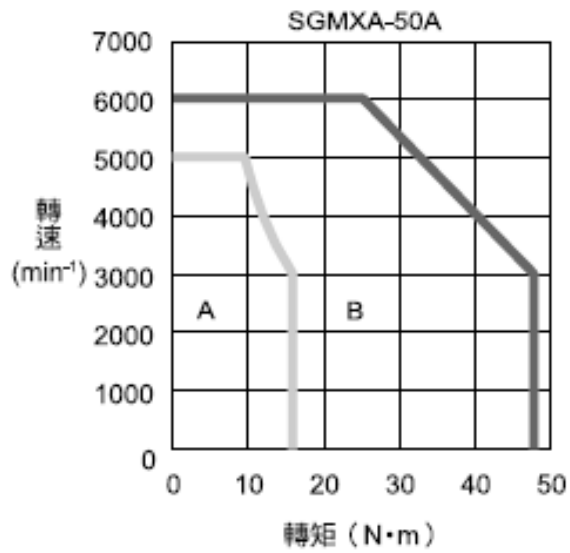

◆ 軸端規格

- 直軸、附鍵槽、附螺絲孔

