

型號 SGMJ-	L *1	LL *1	LM	法蘭尺寸						
				LR	LE	LG	LC	LA	LB	LZ
08A□A2□A1	136 (183.0)	96 (143.0)	78	40	3	8	80	90	70 ⁰ _{-0.030}	7


型號 SGMJ-	S	MD	MW	MH	ML	概略重量 *1[kg]
08A□A2□A1	19 ⁰ _{-0.013}	14	37	17	19.3	2.2 (2.8)

伺服馬達額定值

電壓		200 V						
型號 SGMJ-		A5A	01A	C2A	02A	04A	06A	08A
額定輸出 *1	W	50	100	150	200	400	600	750
額定轉矩 *1, *2	N·m	0.159	0.318	0.477	0.637	1.27	1.91	2.39
瞬時最大轉矩 *1	N·m	0.557	1.11	1.67	2.23	4.46	6.69	8.36
額定電流 *1	Arms	0.55	0.85	1.6	1.6	2.5	4.2	4.4
瞬時最大電流 *1	Arms	2.0	3.1	5.7	5.8	9.3	15.3	16.9
額定轉速 *1	min ⁻¹	3000						
連續容許轉速	min ⁻¹	7000			6000			
最高轉速 *1	min ⁻¹	7000						




T-N 曲線

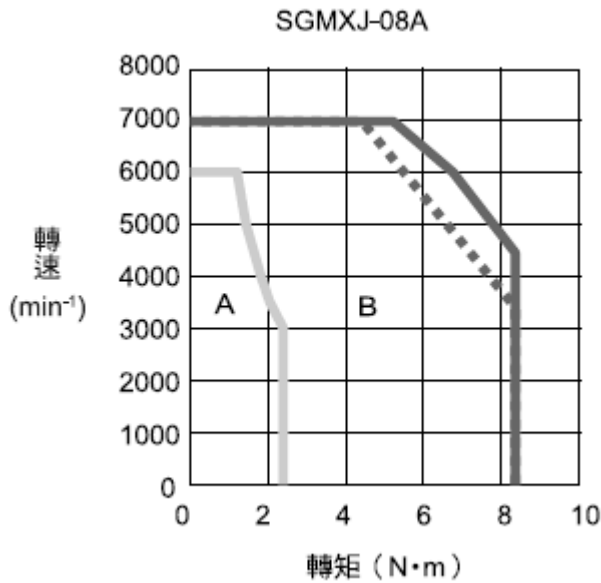


■ 軸端規格

- 直軸、帶鍵槽、附螺絲孔

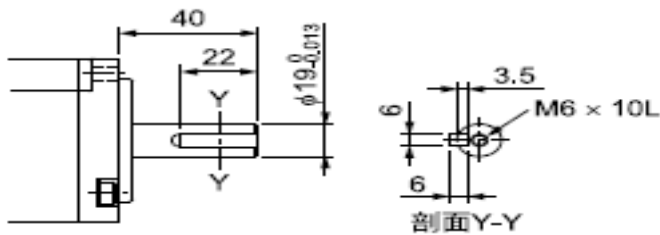

- 帶雙面平面座

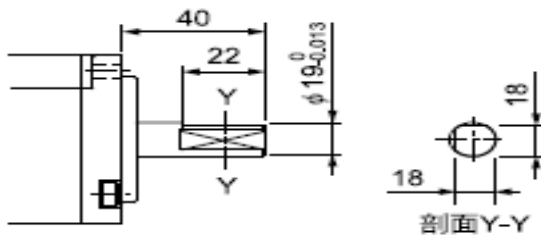

■ 選購品規格

- 帶油封

